

Brgy. Carayman, Calbayog City

To: All Samelco I Accredited Suppliers

Date: September 18, 2026

You are hereby invited to submit your sealed bid for the requirement listed below.

Bid No. 2026-019					
Supply and Delivery of 6kW Hybrid Solar Power Station at San Agustin Substation					
Lot No.	RV No. & Date	Quantity	ITEM DESCRIPTION	Approved Budget for Contract (ABC) Inclusive of 12% VAT	Source of Fund
1	RV No. 21160 / January 09, 2026	Various Quantities	See attached list	₱357,245.00	General Fund

SCHEDULE OF ACTIVITIES:		
1.	Date of Confirmation of Bids and Issuance of Bids Document (Sealed Canvass) Electronic Copy	September 25, 2026
2.	Deadline for Submission of Bid Proposal of Sealed Envelope	September 25, 2026 to October 02, 2026
3.	Delivery Period	30 Calendar days upon receipt of Purchase Order
4.	Place of Delivery	Samelco I Headquarters, Brgy. Carayman, Calbayog City

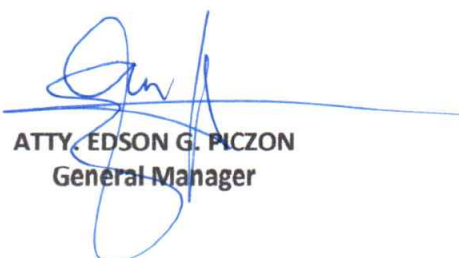
Instructions:

SEALED BID proposal shall be submitted to the BAC Secretariat-Attention to BAC Chairman Samelco I Office, Brgy. Carayman, Calbayog City Samar 6710 not later than 5:00 PM of October 01, 2026 with a label at front as Proposal for Bid Sealed Bid No. Bid No. 2026-019.

- The complete specifications and Terms of Reference may be secured from the BAC. Interested in SAMELCO I accredited supplier/Bidders may email at the address provided below.
- Bidding will be conducted through simplified bidding procedures (sealed canvass) as specified in the Alternative Modes of Procurement in the NEA Memorandum 2017-019, otherwise known as the "Revised Procurement Guidelines and Simplified Bidding Procedures for Electric Cooperatives IRR-RA10531 (2017)".
- Late bids shall not be accepted.
- The Samar 1 Electric Cooperative, Inc. (SAMELCO I) hereby reserves the right to reject any or all bids, to award in whole or in part, declare a failure of bidding, or not to award the contract without disclosing any reason, to waive minor defects or infirmities therein, and to accept such bids as may be deemed advantageous to SAMELCO I.
- Bid Proposals should be received via JRS, LBC, or any express courier not later than 5:00 PM of October 01, 2026, or via E-mail with password on or before 10:00 AM of October 02, 2026.

For further information you may contact: **0977-660-7176**
 SAMELCO I BAC email: samelco1bac@gmail.com


ENGR. SANDY T. MONTERO
 BAC Chairman


ATTY. EDSON G. PICZON
 General Manager

Item No.	Quantity	Unit	MATERIAL/DESCRIPTION
1	1	set	6kW Hybrid Inverter
2	1	pcs	51.2v 230Ah Lifepo4
3	10	pcs	620W Solar Panel
4	4	pcs	2 Meters PVC Cable Tray (100x100)
5	2	pcs	Metal Enclosure Box Electrical Circuit Box Panel (40x50x20)
6	3	pcs	2P DC SPD
7	3	pcs	2P AC SPD
8	1	pcs	Automatic Transfer Switch
9	3	pcs	20AT DC MCB
10	4	pcs	40AT AC MCB
11	1	pcs	250AT DC MCB
12	2	pcs	Pioneer Eslastoseal Clear 300ml Cartridge
13	3	pcs	Junction Box IP65 White Plastic Waterproof (100x100x70)
14	10	pcs	Cable Gland IP68 PG 29 Black
15	5	pcs	PVC Cable Tray Accessories Endcap 100x100
16	5	pcs	PVC Cable Tray Accessories Anglebend 100x100
17	5	pcs	PVC Cable Tray Accessories Tee 100x100
18	5	pcs	PVC Cable Tray Accessories Connection 100x100
19	5	pcs	PVC Cable Tray Accessories Endcap Square 100x100
20	15	pcs	Cable Gland IP68 PG 25 Black
21	15	pcs	Cable Gland IP68 PG 48 Black
22	30	mtrs	Metal Conduit Flexible hose 1/2"
23	2	pcs	Cable Tie 4"
24	2	pcs	Cable Tie 12"
25	6	pcs	Metal Grooved Rail DIN Track (40CM)
26	2	pcs	Drill Bit for Concrete
27	2	pcs	Drill Bit for Masonry
28	2	set	Ferrule connector copper
29	12	pcs	Railing
30	36	pcs	L-Foot
31	24	pcs	Mid Clamp
32	6	pcs	End Clamp
33	20	pcs	MC4 Pair Solid Pin
34	1	package	Grounding Rod and Grounding Clamp
35	12	pcs	Rail Connector
36	50	meters	8mm2 THHN (Black)
37	50	meters	8mm2 THHN (Red)
38	50	meters	5mm2 THHN (Green)
39	30	pcs	8mm2 THHN Terminal Lug
40	20	meters	#12 Silicon Wire(Red)
41	20	meters	#12 Silicon Wire (Black)
42	10	meters	35mm2 Battery Cable (Black)
43	10	meters	35mm2 Battery Cable (Red)
44	30	pcs	35mm2 Terminal Lug
45	50	meters	PV Cable 6mm2 (Twin Core)
46	20	meters	HDPE Conduit 20MM
47	1	Roll	HDPE Conduit 40MM
48	3	length	EMT PIPE #1
49	4	pcs	CONDULET #1
50	10	pcs	EMT CONDUIT FITTING CONNECTOR
51	10	pcs	EMT CONDUIT FITTING COUPLER
52	10	pcs	Two Hole Clamp EMT #1
53	15	pcs	Two Hole Clamp EMT #3/4
54	1	pcs	Nema 3R DIN Rail Type
55	1	pcs	MCB 125Amp